

# Diesel Powered Generating Sets C135-D6

Standard Genset Features	Generator Set Performance	Generator Set Options
<p>Cummins water cooled Diesel engine, Oil and fuel filter fitted, water separator., Lube-oil drain valve fitted Electric starter &amp; Charge alternator 12 v D.C. Mechanical governor Normal duty air filter Single bearing alternator, class H/H Standard voltage 480/277 volts 60 Hz Exciter/Voltage reg - Torque Match as std PCC1300 without Bargraph as standard 3 pole C/B Steel base frame with A/V mounting, Single skin fuel tank Tank capacity of up to 8 hours operation at 70% standby load Optional Silencer Optional Set mounted starting batteries Engine, Alternator, Chassis &amp; Control Box Musell Jade Green Radiator black Packing under shrunk plastic film Operation &amp; Maintenance manual Standard set of labels</p>	<p><b>Voltage Regulation</b> Maintains voltage output to within <math>\pm 1.0\%</math>. At any power factor between 0.8 and 1.2 At any variations from No load to Full load. At any variations from Cold to Hot. At speed droop variations up to 4.5%. <b>Frequency Regulation</b> Isochronous under varying loads from no load to 100% full load when electronic governor is fitted. <b>Random Frequency Variation</b> Will not exceed <math>\pm 0.25\%</math> of its mean value for constant loads – no load to full load. <b>Waveform</b> Total harmonic distortion open circuit voltage waveform in the order of 1.8%. Three-phase balanced load in the order of 5.0%. <b>Telephone Influence Factor (TIF)</b> TIF better than 50. THF to BS 4999 Part 40 better than 2%. <b>Alternator Temperature Rise</b> Class H insulation.  <b>Radio Interference</b> In compliance with BS 800 and VDE levels G and N.</p>	<p><b>Fuel options</b> Fuel Tank deletion Steel Fuel Tank replacing Plastic Fuel Tank  <b>Exhaust Options</b> Exhaust Silencer - Industrial In-Line Exhaust Bellows Exhaust Silencer - Residential , In-Line Installation Kit - Industrial Silencer Installation Kit - Residential Silencer  <b>Warranty</b> Warranty - 5 Year Extended Standby Appln Warranty - 2 Year Extended Prime Appln  <b>Voltage Connections</b> 254/440V 240/416V 230/400V 220/380V 127/220V 115/200V 110/190V  <b>Miscellaneous Options</b> Coolant heater -240V Battery Charger 240V,5A AUTO START - AMF Module (Loose) Packing - Export Box 4 POLE MCCB</p>
Engine Specification	Alternator Specification	Compliance Standards
<p><b>6BTA5.9G2</b> In-line direct injection 6-cylinder diesel engine. <b>Type</b> Water cooled, four cycle, turbocharged and after cooled. Construction Two valves per cylinder, forged steel crankshaft and connecting rods, cast iron block. <b>Starting</b> 12 volt negative earth. Battery charging alternator 37 amp on engine. Cranking current 625 amps at 0°C. <b>Fuel System</b> 12 volt fail safe actuator. Spin-on paper element fuel filter with fuel pump injection system with integral mechanical governor. Dual flexible fuel lines and connectors. Standard fuel water separator. <b>Filters</b> Air cleaner with dry element Spin-on full flow lube oil filter. <b>Cooling</b> 50°C radiator as std Stone guard. Oil cooler. Drain Tap</p>	<p><b>Type</b> Brushless single bearing, revolving field, pole, drip proof, screen protected. Class H Insulation. IC 01 cooling system. Fully interconnected damper winding. AC exciter and rotating rectifier unit. Epoxy coated stator winding. Rotor and exciter impregnated with tropical grade insulating oil and acid resisting polyester resin. Dynamically balanced rotor BS 5625 grade 2.5. Sealed for life bearings. Layer wound mechanically wedged rotor.  <b>Exciter</b> Triple dipped in moisture, oil and acid resisting polyester varnish and coated with anti-tracking varnish.  Output windings with 2/3 pitch for improved harmonics and paralleling ability. Close coupled engine/alternator for perfect alignment.</p>	<p>To BS4999/5000 pt 99, VDE 0530, UTE5100, NEMA MG1-22, CEMA, IEC 34, CSA A22.2, AS1359, BSS 5514, ISO 3046 and ISO 8528</p>

Model name	kWe		kVA	
	Standby	Prime	Standby	Prime
C135 D6	135	122	169	153

## Technical Data

<b>Model</b>	C135-D6	<b>Speed</b>	1800 rpm
<b>Set output</b>	380-480 V 60 Hz	<b>Alternator voltage regulation</b>	±1.0%
<b>Prime Rating</b>	135 kW/ 169 kVA	<b>Alternator insulation class</b>	H
<b>Standby Rating</b>	122 kW/ 153 kVA	<b>Fuel consumption (Prime)</b>	TBA
<b>Engine Make</b>	Cummins	<b>Fuel consumption (Standby)</b>	TBA
<b>Engine Model</b>	6BTA5.9G2	<b>Lubrication system oil capacity</b>	15 Litres
<b>Cylinders</b>	Six	<b>Base fuel tank capacity – open set</b>	200 Litres
<b>Engine build</b>	In-line	<b>Coolant capacity</b>	21.1 Litres
<b>Standard Governor/Class</b>	Mechanical	<b>Exhaust temp – prime</b>	TBA
<b>Aspiration and cooling</b>	Turbocharged Aftercooled	<b>Exhaust gas flow – prime</b>	TBA
<b>Bore and stroke</b>	102 mm x 120 mm	<b>Exhaust gas back pressure max</b>	76 mm Hg
<b>Compression Ratio</b>	17.3:1	<b>Air flow – radiator*</b>	TBA
<b>Cubic capacity</b>	5.9 Litres	<b>Air intake – engine (Prime)</b>	TBA
<b>Starting/Min °C</b>	Unaided/10°C	<b>Minimum air opening to room</b>	TBA
<b>Battery capacity</b>	100 A/hr	<b>Minimum discharge opening</b>	TBA
<b>Gross Engine output – Prime</b>	TBA	<b>Pusher fan head (duct allowance)*</b>	TBA
<b>Gross Engine output – Standby</b>	TBA	<b>Heat radiated by eng (Prime)</b>	TBA

### PRIME POWER (PRP)

Prime power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation, in accordance with ISO 3046-1.


### STANDBY POWER RATING (ESP)

The Standby Power Rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

In installations served by unreliable utility sources (where outages last longer or occur more frequently), where operation is likely to exceed 200 hours per year, the prime power rating should be applied. The Standby Power rating is only applicable for emergency and standby applications where the generator set serves as the back up to the normal utility source.

All ratings are based on the following reference conditions:

- Ambient temperature – 27°C      - Altitude above sea level - 150 metres      - Relative humidity – 60%

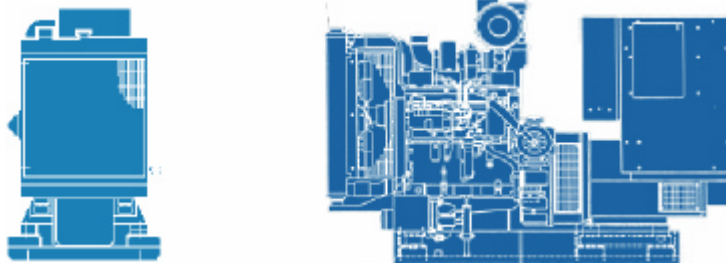

## Dimensions and Weights

Model	Engine	Length (mm)	Width (mm)	Height (mm)	Set weight wet (Kg)	Set weight dry (Kg)	Enclosed Set (Kg)
C135-D6	6BTA5.9G2	2950	1135	1480	1750	1442	2302

Specifications may change without notice

**Cummins Power Generation**  
 Asia Pacific  
 8 Tanjong Penjuru  
 Singapore 609019  
 Telephone: (65) 6265 0155  
 Fax: (65) 6266 0432  
 Email: [mktg.sing@cummins.com](mailto:mktg.sing@cummins.com)  
[www.cumminspower.com](http://www.cumminspower.com)

See your distributor for more information.

