

# Diesel Powered Generating Sets C35-D6

## Standard Genset Features

Cummins water cooled Diesel engine,  
Oil and fuel filter fitted, water separator,,  
Lube-oil drain valve fitted  
Electric starter & Charge alternator 12 v D.C.  
Mechanical governor  
Normal duty air filter  
Single bearing alternator, class H/H  
Standard voltage 480/277 volts 60 Hz  
Exciter/Voltage reg - Torque Match as std  
PCC1300 without Bargraph as standard  
3 pole C/B  
Steel base frame with A/V mounting,  
Single skin fuel tank  
Tank capacity of up to 8 hours operation at  
70% standby load  
Optional Silencer  
Optional Set mounted starting batteries  
Engine, Alternator, Chassis & Control Box  
Musell Jade Green  
Radiator black  
Packing under shrunk plastic film  
Operation & Maintenance manual  
Standard set of labels

## Generator Set Performance

**Voltage Regulation**  
Maintains voltage output to within  $\pm 1.0\%$ .  
At any power factor between 0.8 and 1.0  
At any variations from No load to Full load.  
At any variations from Cold to Hot.  
At speed droop variations up to 4.5%.  
**Frequency Regulation**  
Isochronous under varying loads from no  
load to 100% full load when electronic  
governor is fitted.  
**Random Frequency Variation**  
Will not exceed  $\pm 0.25\%$  of its mean value for  
constant loads – no load to full load.  
**Waveform**  
Total harmonic distortion open circuit voltage  
waveform in the order of 1.8%. Three-phase  
balanced load in the order of 5.0%.  
**Telephone Influence Factor (TIF)**  
TIF better than 50.  
THF to BS 4999 Part 40 better than 2%.  
**Alternator Temperature Rise**  
Class H insulation.  
**Radio Interference**  
In compliance with BS 800 and VDE levels  
G and N.

## Generator Set Options

**Fuel options**  
Fuel Tank deletion  
Steel Fuel Tank replacing Plastic Fuel Tank  
**Exhaust Options**  
Exhaust Silencer - Industrial In-Line  
Exhaust Bellows  
Exhaust Silencer - Residential , In-Line  
Installation Kit - Industrial Silencer  
Installation Kit - Residential Silencer  
**Warranty**  
Warranty - 5 Year Extended Standby Appln  
Warranty - 2 Year Extended Prime Appln  
**Voltage Connections**  
254/440V  
240/416V  
230/400V  
220/380V  
127/220V  
115/200V  
110/190V  
**Miscellaneous Options**  
Coolant heater -240V  
Battery Charger 240V,5A  
AUTO START - AMF Module (Loose)  
Packing - Export Box  
4 POLE MCCB

## Engine Specification

**4B3.3-G1**  
In-line direct injection  
4-cylinder diesel engine.  
**Type**  
Water cooled, four cycle, naturally aspirated  
**Construction**  
Two valves per cylinder, forged steel  
crankshaft and connecting rods, cast iron  
block.  
**Starting**  
12 volt negative earth. Battery charging  
alternator 37 amp on engine. Cranking  
current 625 amps at 0°C.  
**Fuel System**  
12 volt fail safe actuator. Spin-on paper  
element fuel filter with fuel pump  
injection system with integral mechanical  
governor. Dual flexible fuel lines and  
connectors. Standard fuel water separator.  
**Filters**  
Air cleaner with dry element  
Spin-on full flow lube oil filter.  
**Cooling**  
50°C radiator as std  
Stone guard. Oil cooler. Drain Tap

## Alternator Specification

**Type**  
Brushless single bearing, revolving field,  
pole, drip proof, screen protected.  
Class H Insulation.  
IC 01 cooling system.  
Fully interconnected damper winding.  
AC exciter and rotating rectifier unit.  
Epoxy coated stator winding.  
Rotor and exciter impregnated with tropical  
grade insulating oil and acid resisting  
polyester resin. Dynamically balanced rotor  
BS 5625 grade 2.5.  
Sealed for life bearings.  
Layer wound mechanically wedged rotor.  
**Exciter**  
Triple dipped in moisture, oil and acid  
resisting polyester varnish and coated with  
anti-tracking varnish.  
Output windings with 2/3 pitch for improved  
harmonics and paralleling ability.  
Close coupled engine/alternator for perfect  
alignment.

## Compliance Standards

To BS4999/5000 pt 99,  
VDE 0530, UTE5100,  
NEMA MG1-22, CEMA,  
IEC 34, CSA A22.2,  
AS1359, BSS 5514,  
ISO 3046 and ISO 8528

Model name	kWe		kVA	
	Standby	Prime	Standby	Prime
C35 D6	35	32	44	40

## Technical Data

<b>Model</b>	C35-D6	<b>Speed</b>	1800 rpm
<b>Set output</b>	380-480 V 60 Hz	<b>Alternator voltage regulation</b>	±1.0%
<b>Prime Rating</b>	35 kWe 44 kVA	<b>Alternator insulation class</b>	H
<b>Standby Rating</b>	32 kWe 40 kVA	<b>Fuel consumption (Prime)</b>	9.7 l/hr
<b>Engine Make</b>	Cummins	<b>#REF!</b>	11.3 l/hr
<b>Engine Model</b>	4B3.3-G1	<b>Lubrication system oil capacity</b>	7.5 Litres
<b>Cylinders</b>	Four	<b>Base fuel tank capacity – open set</b>	150 Litres
<b>Engine build</b>	In-line	<b>Coolant capacity</b>	21.1 Litres
<b>Standard Governor/Class</b>	Mechanical	<b>Exhaust temp – prime</b>	460°C
<b>Aspiration and cooling</b>	Natural aspiration	<b>Exhaust gas flow – prime</b>	99 l/s
<b>Bore and stroke</b>	95 mm x 115 mm	<b>Exhaust gas back pressure max</b>	75 mm Hg
<b>Compression Ratio</b>	18.2:1	<b>Air flow – radiator*</b>	2.7 m <sup>3</sup> /s
<b>Cubic capacity</b>	3.3 Litres	<b>Air intake – engine (Prime)</b>	50 Litre/s
<b>Starting/Min °C</b>	Unaided/10°C	<b>Minimum air opening to room</b>	0.7 m <sup>2</sup>
<b>Battery capacity</b>	50 A/hr	<b>Minimum discharge opening</b>	0.5 m <sup>2</sup>
<b>Gross Engine output – Prime</b>	38kWm	<b>Pusher fan head (duct allowance)*</b>	10 mmWg*
<b>Gross Engine output – Standby</b>	42kWm	<b>Heat radiated by eng (Prime)</b>	6.3kWm

### PRIME POWER (PRP)

Prime power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation, in accordance with ISO 3046-1.

### STANDBY POWER RATING (ESP)


The Standby Power Rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

In installations served by unreliable utility sources (where outages last longer or occur more frequently), where operation is likely to exceed 200 hours per year, the prime power rating should be applied.

The Standby Power rating is only applicable for emergency and standby applications where the generator set serves as the back up to the normal utility source.

All ratings are based on the following reference conditions:

- Ambient temperature – 27°C      - Altitude above sea level - 150 metres      - Relative humidity – 60%

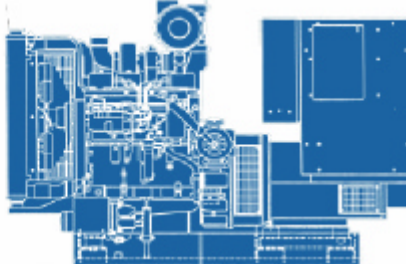

## Dimensions and Weights

Model	Engine	Length (mm)	Width (mm)	Height (mm)	Set weight wet (Kg)	Set weight dry (Kg)	Enclosed Set (Kg)
C35-D6	4B3.3G1	2253	1005	1450	700	TBA	2000

Specifications may change without notice

**Cummins Power Generation**  
 Asia Pacific  
 8 Tanjong Penjuru  
 Singapore 609019  
 Telephone: (65) 6265 0155  
 Fax: (65) 6266 0432  
 Email: [mktg.sing@cummins.com](mailto:mktg.sing@cummins.com)  
[www.cumminspower.com](http://www.cumminspower.com)

See your distributor for more information.

