

## Diesel Powered Generating Sets 281 kW - 350 kW 60 Hz NT855 Series Engines



Model 322 DFCC shown with optional base and circuit breaker

### Standard Genset Features

#### Single Source Responsibility

- Design, manufacture and test of all components and accessories are made by Cummins Power Generation and Cummins companies

#### International Integrity

- Assurance and strength of a worldwide, world class corporation

#### Global Backing

- 24 hour spares and service support – in 72 countries

#### Single Source Warranty

- Complete genset covered by Cummins Power Generation comprehensive warranty

#### Packaged Self-Contained Units

- Units with built in antivibration systems with provision for base fuel tank and other accessories

#### Cummins Engine

- Heavy duty 4 cycle water cooled engine
- Electronic governor control

#### Cooling System

- 50°C cooling package

#### Ready Filled

Every set comes filled with lube oil and anti-freeze

#### Alternator

- Brushless Group made machine
- Close voltage regulation
- Rotor and exciter impregnated with oil and acid resisting resin
- 12 lead reconnectable
- Exceptional short circuit capability
- Low waveform distortion with non linear loads

#### Ratings

All kW Power ratings based on a 40°C ambient temperature reference.

#### Chassis

Built-in anti-vibration system  
Bonded rubber units fitted as standard eliminates need for rubber mats or spring mountings

#### Integrated Control System

- Totally integrated design
- Full AC instrumentation
- Safety shutdowns
- Local or Remote starting
- Emergency stop button (optional)
- CE and non CE options

#### Optional PCC PowerCommand Control System

- Microprocessor control
- Integrates governor and voltage regulation systems
- Superior alternator and genset protection system
- Accurate battery monitoring system
- Totally reliable and proven system




**Quality Assurance**  
Registered Firm Certificate Number FM509 in accordance with:  
BS EN ISO 9001  
Quality Assurance Schedule 3420/1



Cummins Power Generation, Cummins Engines and Newage Alternators are all part of the same group

60 Hz Ratings				
Model Prime	Prime kW (kVA)	Model Standby	Standby kW (kVA)	Engine Model
281 DFCC	281 (351)	312 DFCC	312 (390)	NT855G2
322 DFCC	322 (402)	350 DFCC	350 (437)	NT855G3

## A Single Source for *all* Power System Solutions

# Specifications

## Generator Set Performance

### Voltage Regulation

Maintains voltage output to within  $\pm 1.0\%$ .  
At any power factor between 0.8 lagging and unity.  
At any variations from No load to Full load.  
At any variations from Cold to Hot.  
At speed droop variations up to 4.5%.

### Frequency Regulation

Isochronous under varying loads from no load to 100% full load when electronic governor is fitted.

### Random Frequency Variation

Will not exceed  $\pm 0.25\%$  of its mean value for constant loads – no load to full load.

### Waveform

Total harmonic distortion open circuit voltage waveform in the order of 1.5%. Three-phase balanced load in the order of 5.0%.

### Telephone Influence Factor (TIF)

TIF better than 50.  
THF to BS4999 Part 40 better than 2%.

### Alternator Temperature Rise

Class H insulation. Temperature rise up to 125°C permitted.

### Radio Interference

In compliance with BS800 and VDE levels G and N.

## Engine

Cummins NTA855G2 and G3 in-line direct injection 6-cylinder diesel engines.

### Type

Water cooled, four cycle, turbo charged after cooled.

### Construction

Four valves per cylinder, forged steel crankshaft and connecting rods, cast iron block, replaceable wet liners.

### Starting

24 volt negative earth. Battery charging alternator 45 amp on N Range. Cranking current 640 amps at 0°C.

### Fuel System

24 volt fail safe actuator. Dual spin-on paper element fuel filters with Cummins PT fuel injection system with integral electronic governor. Dual flexible fuel lines and connectors.

### Filters

Air cleaner with dry element and restriction indicator. Spin-on full flow lube oil filters and corrosion resistor filter.

### Cooling

50°C radiator as standard. Oil cooler.

## Alternator

### Type

Brushless, single bearing, revolving field, pole, drip proof, screen protected.  
Class H insulation.  
Enclosed to IP22 (NEMA 1) standard.  
IC 01 cooling system.  
Fully interconnected damper winding.  
AC exciter and rotating rectifier unit.  
Epoxy coated stator winding.  
Rotor and exciter impregnated with tropical grade insulating oil and acid resisting polyester resin. Dynamically balanced rotor to BS5625 grade 2.5.  
Sealed for life bearings.  
Layer wound mechanically wedged rotor.

### Exciter

Triple dipped in moisture, oil and acid resisting polyester varnish and coated with anti-tracking varnish.  
Sealed solid state automatic voltage regulator – self-exciting, self-regulating.  
Output windings with 2/3 pitch for improved harmonics and paralleling ability.  
Close coupled engine/alternator for perfect alignment.

## Compliance Standards

To BS4999/5000 pt 99,  
VDE 0530, UTE5100,  
NEMA MG1-22, CEMA,  
IEC 34, CSA A22.2,  
AS1359, BS 5514,  
ISO 3046 and ISO 8528

## Chassis

Fabricated and welded steel chassis.  
Built-in anti-vibration mountings.  
Optional sub-base fuel tank with eight hour capacity, dual flexible fuel lines, dial type fuel gauge and drain bung.

### Finish

Etch undercoated and finished in high gloss durable green.

### General

Complete set of operating and instruction manuals.

## Generator Set Options

### Engine

- Heavy duty air cleaner
- Coolant heater and thermostat
- Fuel water separator
- Lead acid batteries, cable and fitted tray
- NiCad batteries
- Sump drain pump
- Oil and water drain taps
- CE Compliance (guarding)
- Exhaust temperature monitoring (PCC only)
- Tool kit
- Compliance to TA Luft

### Cooling

- Remote radiator cooling (built to order)
- Oil temperature indication

### Alternator

- Anti-Condensation heater
- Thermistors
- PMG Exciter and MX321 AVR
- 105°C rise alternator

### Exhaust System

- Industrial type silencer
- Residential type silencer
- Length of flexible exhaust and bellows

### Fuel System

- Sub-base tanks
- Hand fuel transfer pump
- Automatic fuel transfer pump
- Free-standing 450, 900 and 1350 litre fuel tanks with stand
- Fuel tank level switch
- High fuel level warning
- Low fuel level warning
- Low fuel level shutdown


### Generator Set

- Weather protective enclosures
- Silenced enclosures

### Control Panel

- Refer to Control Panel literature for details of options
- 3 or 4 pole circuit breaker
- Battery charger 5 amp or 10 amp
- CE Compliance
- Cable entrance box
- Switch disconnect 3P or 4P

# Technical Data

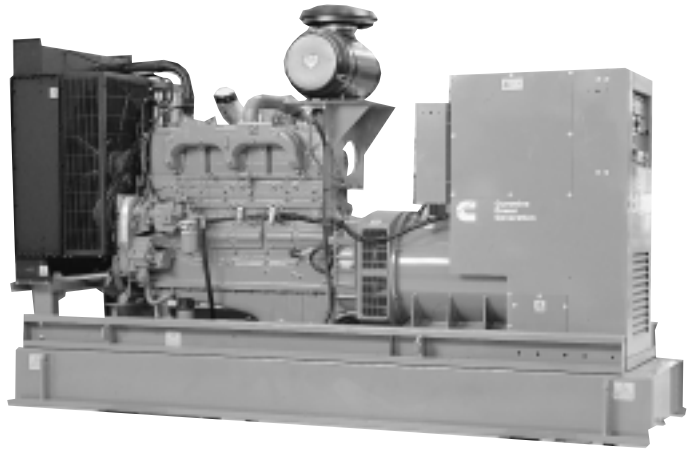

## Generating Sets – 60 Hz


Set output	220-480 V 60 Hz	220-480 V 60 Hz
Prime at 40°C ambient	281 kWe 351 kVA	322 kWe 402 kVA
Model (Prime)	281 DFCE	322 DFCE
Standby at 40°C ambient	312 kWe 390 kVA	350 kWe 437 kVA
Model (Standby)	312 DFCE	350 DFCE
Engine Make	Cummins	Cummins
Model	NTA855G2	NTA855G3
Cylinders	Six	Six
Engine build	In-line	In-line
Governor/Class	Electronic/A1	Electronic/A1
Aspiration and cooling	Turbo Aftercooled	Turbo Aftercooled
Bore and stroke	140 mm x 152 mm	140 mm x 152 mm
Compression ratio	14.0:1	14.0:1
Cubic capacity	14 Litres	14 Litres
Starting/Min °C	Unaided/-7°C	Unaided/-7°C
Battery capacity	127 Ah	127 Ah
Nett Engine output – Prime	299 kWm	344 kWm
Nett at flywheel – Standby	333 kWm	385 kWm
Speed	1800 rpm	1800 rpm
Alternator voltage regulation	±1.0%	±1.0%
Alternator insulation class	H	H
Single load step to NFP/II0	100%	100%
Fuel consumption (Prime) 100% load	79 l/hr	87 l/hr
Fuel consumption (Standby) 100% load	89 l/hr	96 l/hr
Lubrication oil capacity	38.6 Litres	38.6 Litres
Base fuel tank capacity – open set	800 Litres	800 Litres
Coolant capacity – radiator and engine	79.8 Litres	84.8 Litres
Exhaust temp – full load prime	466°C	521°C
Exhaust gas flow – full load prime	4136 m <sup>3</sup> /hr	4734 m <sup>3</sup> /hr
Exhaust gas back pressure max	76 mm Hg	76 mm Hg
Air intake – engine	1613 m <sup>3</sup> /hr	1717 m <sup>3</sup> /hr
Air flow – radiator (50°C)	9.7 m <sup>3</sup> /s	9.2 m <sup>3</sup> /s
Pusher fan head (duct allowance) 50°C	13 mm Wg	13 mm Wg
Total heat radiated to ambient	72 kW	76 kW
Engine derating – altitude	4% per 300 m above 1525 m	4% per 300 m above 1525 m
Engine derating – temperature	2% per 11°C above 40°C	2% per 11°C above 40°C

In accordance with ISO 8528, BS5514.

Prime: Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period.

Standby: Continuous running at variable load for duration of an emergency.

# Dimensions and Weights – 60 Hz

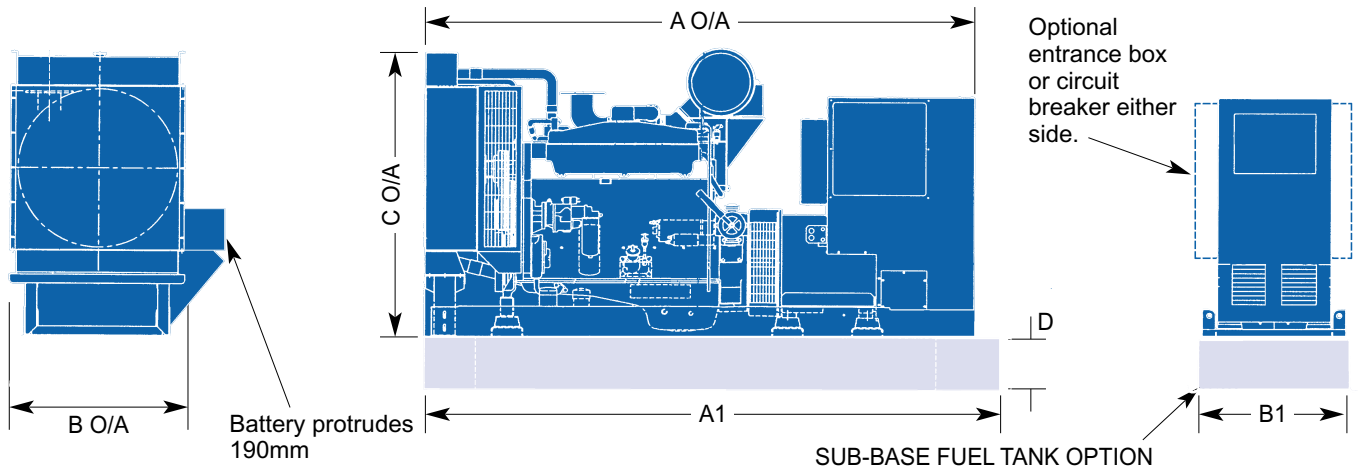

Model	Engine	Dimensions and Weights (mm/kg)						Set Weight kg Dry	Set Weight kg Wet	Tank Weight kg (dry)	Tank Weight kg (wet)
		A	A1	B	B1	C	D				
DFCB	NTA855G2	3286	3338	990	1048	1117	300	3178	3275	445	1085
DFCC	NTA855G3	3304	3338	990	1048	1117	300	3293	3390	445	1085

Set weights are **without** sub-base tank.

Dimensions and weights are for **guidance** only. Do not use for installation design. Ask for certified drawings on your specific application. Specifications may change without notice.



See your distributor for more information.

Cummins Power Generation Limited  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0)1843 255000  
 Fax: +44 (0)1843 255902  
 Email: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
[www.cumminspower.com](http://www.cumminspower.com)  
[www.cummins.com](http://www.cummins.com)

Cummins is a registered trademark of Cummins Inc.